


# Caliper Disc Brake

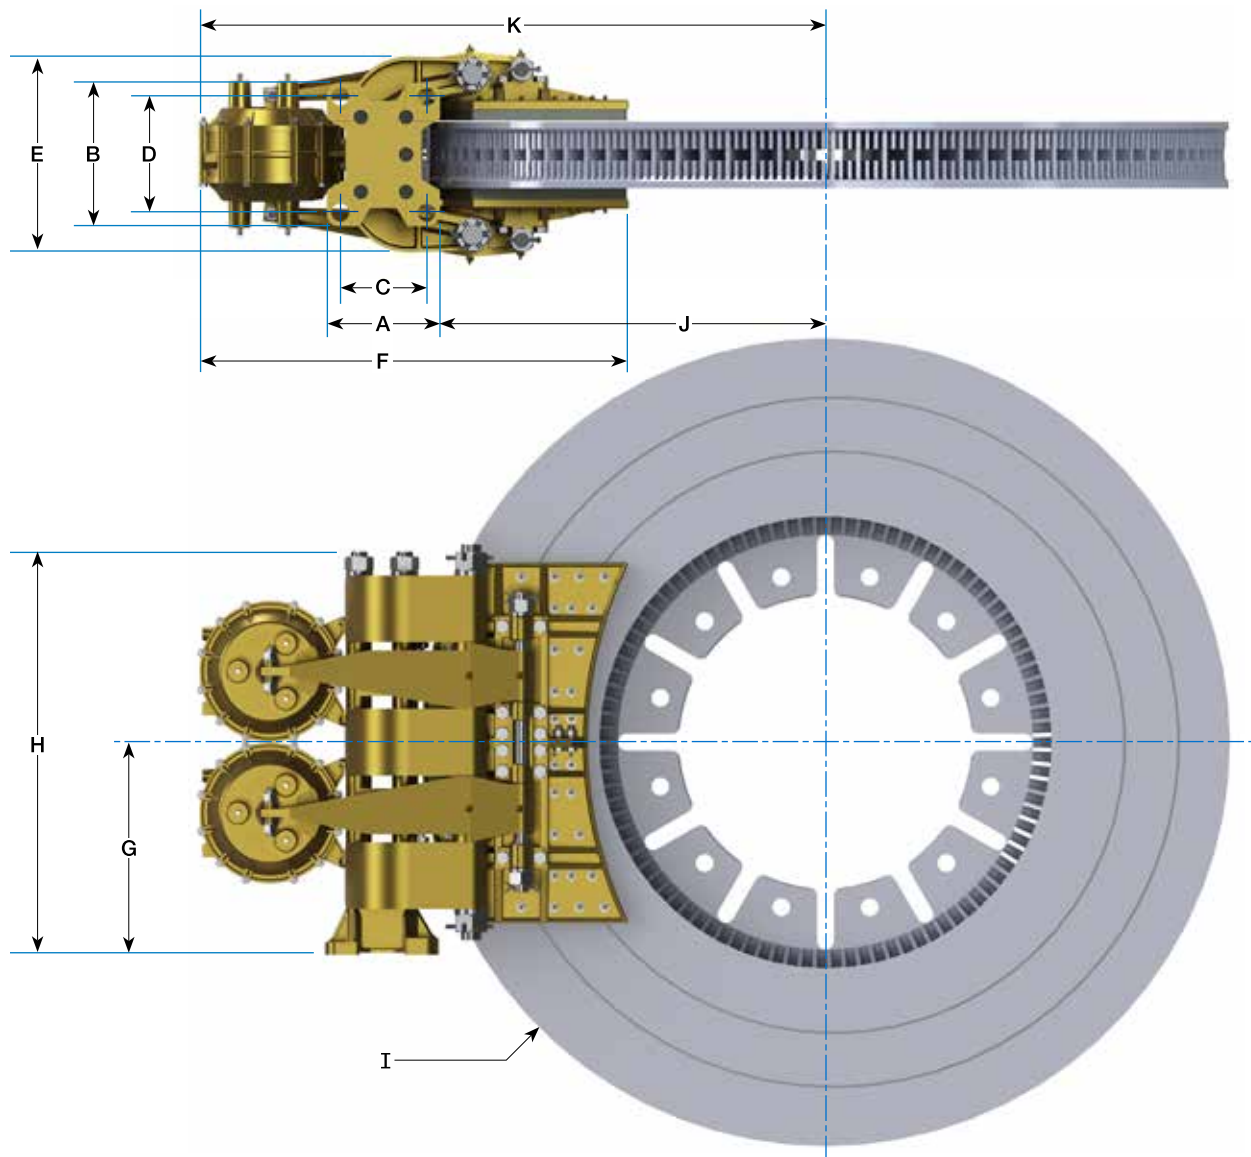

Model	Caliper Dimensions								Rotor Dimensions		
	A	B	C	D	E	F	G	H	I	J	K
WDA-26	6 1/4 (159)	7 1/2 (191)	4.750 (120.65)	7.500 (190.50)	10 15/16 (278)	20 1/2 (521)	9 1/2 (242)	18 1/2 (470)	30 (762)	14 1/2 (368)	27 1/16 (687)
									40 (1016)	19 1/2 (495)	32 1/16 (815)
									48 (1219)	23 1/2 (597)	36 1/16 (916)
WDA-28	6 13/16 (173)	8 5/8 (219)	5.203 (132.16)	7.000 (177.80)	12 3/8 (318)	25 3/4 (654)	12 3/4 (324)	24 1/2 (622)	48 1/2 (1232)	23 1/16 (585)	37 9/16 (954)
									54 1/2 (1384)	26 1/16 (662)	40 9/16 (1030)
									60 1/2 (1537)	29 1/16 (738)	43 9/16 (1107)

Model	Rotor Sizes in (mm)	Torque lbf-ft (N-m)	Maximum Speed r/min	Effective Radius ft (m)	Maximum Pressure lbf/in <sup>2</sup> (bar)	Volume Per Actuation Max in <sup>3</sup> (cm <sup>3</sup> )	Clamping Force Total lbf (N)	Lining Area Total in <sup>2</sup> (cm <sup>2</sup> )	Lining Wear Max in (mm)
WDA-26	30 (762)	15,300 (20800)	1150	0.96 (0.29)	100 (7)	110 (1820)	31,800 (141500)	200 (1290)	0.35 (9)
	40 (1016)	21,700 (29400)	860	1.36 (0.42)					
	48 (1219)	26,900 (36400)	720	1.69 (0.51)					
WDA-28	48 1/2 (1232)	38,100 (51600)	710	1.59 (0.48)	100 (7)	180 (2950)	48,000 (213600)	415 (2677)	0.38 (10)
	54 1/2 (1384)	43,900 (59500)	630	1.83 (0.56)					
	60 1/2 (1537)	49,700 (67400)	570	2.07 (0.63)					

WPT Power is constantly striving to improve and develop the product range. For this reason, WPT Power reserves the right to make changes in any product information without prior notice. Every effort has been made

to ensure that the dimensions, performance, specifications, etc. are correct at the time of printing. For more information, please contact your authorized WPT Power distributor or visit: [WPTpower.com](http://WPTpower.com).